


### Legend

Building site earthworks extents

- Cut
- Fill
- Proposed carriageways and 4wd access
- Proposed lot boundaries
- Proposed building sites (12m x 18m)
- Pipeline easement

- NOTES:
1. This plan to be used for resource consent purposes only.
  2. Earthworks shown here (total 4060m<sup>2</sup>, 1028m<sup>3</sup> of cut to fill) are not required for issuing of titles. This is optional works to be offered to lot purchasers.
  3. All building site earthworks to be appropriately drained and approved/supervised by a geotechnical engineer.
  4. Maximum cut height proposed = 3m
  5. Maximum fill depth proposed = 2m (excluding lot 102 fill)
  6. Fill on Lot 102 to be used as necessary for excess fill from other lots.
  7. Silt to be properly managed on each site and organic material to be respread and hydroseeded as immediately practicable.

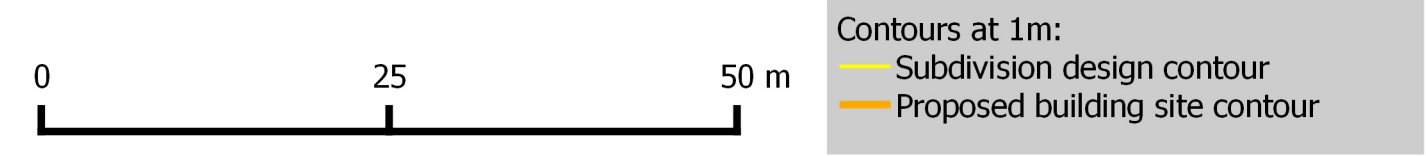

**Progeni Ltd**

68 Exploration Way,  
Porirua 5024  
Ph 64 022 0819600

Copyright 2013 Progeni Ltd.  
All rights reserved

Project:  
Subdivision of Lot 2 DP 356205 and Lot 1 DP 426821

Title:  
Earthworks extents for additional building site / section development

Approvals:

Date:	Function:	By:	Signature:
2013-11-28	Design	DWH	
2013-11-28	Drawn	DWH	
	Checked		
	Checked		

Versions:

Rev:	Amendment:	By:	Date:
A	Initial issue	DWH	2013-11-28
B	Redrawn after neighbor consult	DWH	2012-12-14

Drawing No:  
**201311-P1-E Rev B**  
**A3 Scale 1:550**